

The Bob Each Way 65 profile is a compact uplight/downlight solution. A versatile system suitable for various mounting options, Bob Each Way 65 can be surface mounted, wall mounted and suspended. Both wire and rod suspension options are available for the Bob Each Way 65 profile.

MOUNTING OPTIONS		DIFFUSER OPTIONS		SUPER SERIES LED STRIP OPTIONS			SUPER SERIES LED STRIP OPTIONS		
Surface mounted	Opal	Lumens per metre	Watts per metre	Colour temp.	Lumens per metre	Watts per metre	Colour temp.		
Rod suspended	Clear	270lm		2700K	2000lm		2700K		
Wire suspended		280lm	2.6W	3000K	2000lm	17W	3000K		
Wall mounted		300lm		4000K	2130lm		4000K		
		470lm		2700K	2190lm		2700K		
		600lm	5W	3000K	2340lm	20.3W	3000K		
		640lm		4000K	2460lm		4000K		
		1250lm		2700K					
		1270lm	11W	3000K					
		1400lm		4000K					


- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP65 and RGBW colour change.  
 - All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.  
 - 5 year manufacturer's warranty on Super Series LED strip.

## ACCESSORIES



## ADDITIONAL INFORMATION

**Applications** Task lighting over kitchen islands or reception counters, mirror lighting.  
**Installation** Interior or exterior (with IP65 rated LED strip).  
**Materials** Extruded aluminium body, polycarbonate diffusers, aluminium end caps.  
**Finish** Natural silver anodised or custom powder coat.  
**Light source** LED ribbon strip.  
**Power supply** 24V DC - remote driver options ranging from 6W up to 320W.  
**Dimmable** Various options available, please enquire.

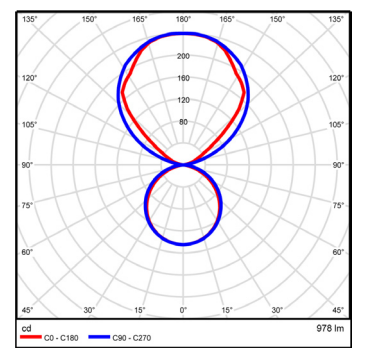

Polar curve for 1890 lumen LED strip down with opal diffuser and 1340 lumen LED strip up with clear diffuser.

