



Sonny Side Up 22

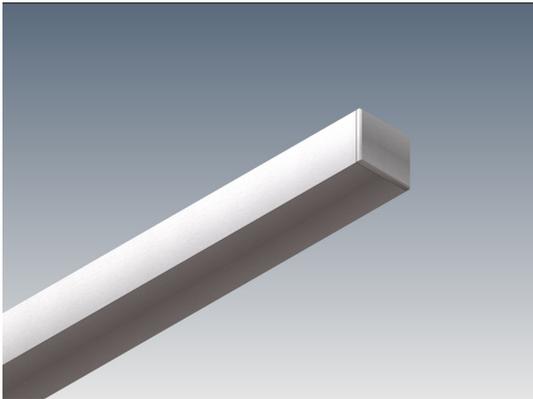

Sonny Side Up 22 is a purpose-designed powerful uplight profile. Don't be fooled by its petite size as it packs a mighty punch of light up to an amazing 2460 lumens per metre. Both wire and rod suspensions are available for the Sonny Side Up 22 extrusion.

MOUNTING OPTIONS		DIFFUSER OPTIONS			SUPER SERIES LED STRIP OPTIONS		
<ul style="list-style-type: none"> Rod suspended Wire suspended 	Clear	Lumens per metre	Watts per metre	Colour temp.	Lumens per metre	Watts per metre	Colour temp.
		270lm	2.6W	2700K	2000lm	17W	2700K
		280lm		3000K	2000lm		3000K
		300lm		4000K	2130lm		4000K
		470lm		2700K	2190lm		2700K
		600lm	5W	3000K	2340lm	20.3W	3000K
		640lm		4000K	2460lm		4000K
		1250lm	11W	2700K	- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP65 and RGBW colour change. - All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data. - 5 year manufacturer's warranty on Super Series LED strip.		
		1270lm		3000K			
		1400lm		4000K			

ACCESSORIES



JN-ST-18
Straight joiner



JN-90-18
90 degree joiner



CB-SSU22-60-R-S / CB-SSU22-60-R-W
Cable base 60, recessed



CB-SSU22-80-SM-S / CB-SSU22-80-SM-W
Cable base 80, surface mount



SWK-4-2M / SWK-4-4M
Wire suspension



SRK-4-S / SRK-4-W
Rod suspension kit (rod not incl)




SRK-9-S / SRK-9-W
Rod suspension kit (rod not incl)



ROD-0.5M / ROD-1M / ROD-2M
Suspension rod - 0.5m, 1m, 2m

ADDITIONAL INFORMATION

Applications	Reception counters, meeting rooms, commercial offices.
Installation	Interior only.
Materials	Extruded aluminium body, polycarbonate diffuser, aluminium end caps.
Finish	Natural silver anodised or custom powder coat.
Light source	LED ribbon strip.
Power supply	24V DC - remote driver options ranging from 6W up to 320W.
Dimmable	Various options available, please enquire.

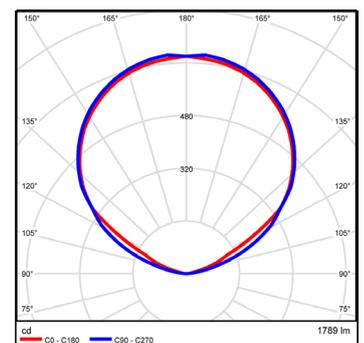

Polar curve for 3200 lumen LED strip with clear diffuser.

