



# Sideways Sally 5C

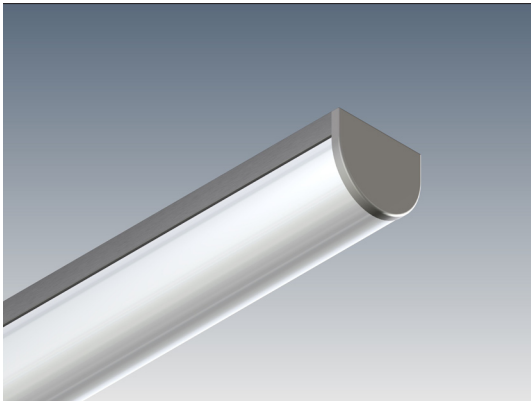


Sideways Sally 5C has many uses as a surface mounted profile solution, whether it is used as a slim-line mirror light in a bathroom, discrete task lighting under a shelf or tucked into a pelmet. With diffuser options of both curved and rectangular, this profile is sure to be a great addition to any specifier's tool kit.

MOUNTING OPTIONS	DIFFUSER OPTIONS	SUPER SERIES LED STRIP OPTIONS		
Surface mounted	Satin	Lumens per metre	Watts per metre	Colour temp.
		270lm	2.6W	2700K
		280lm		3000K
		300lm		4000K
		470lm	5W	2700K
		600lm		3000K
		640lm		4000K
		1250lm	11W	2700K
		1270lm		3000K
		1400lm		4000K

- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP65 and RGBW colour change.  
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.  
- 5 year manufacturer's warranty on Super Series LED strip.


## ACCESSORIES

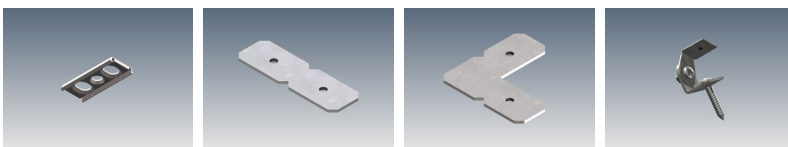

JMC-12 Joinery mounting clip    JN-ST Straight joiner    JN-90 90 degree joiner    MB-ADJ Adjustable mounting bracket

## ADDITIONAL INFORMATION

Applications: Mirror lighting, kitchen joinery, display shelving.  
 Installation: Interior or exterior (with IP65 rated LED strip).  
 Materials: Extruded aluminium body, PMMA diffuser, AES plastic end caps.  
 Finish: Natural silver anodised or custom powder coat.  
 Light source: LED ribbon strip.  
 Power supply: 24V DC - remote driver options ranging from 6W up to 320W.  
 Dimmable: Various options available, please enquire.

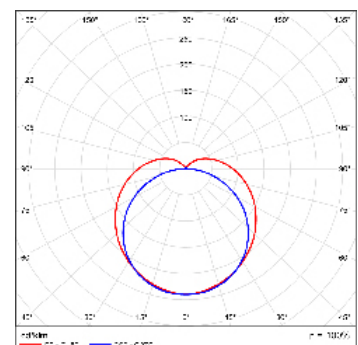

Polar curve for 1340 lumen LED strip with satin diffuser.

